

N65 Wood Stove

N65




Features

Color	- Black
Finish	- Finished in black metallic paint
BTU	- 68,500 (19.8kW) PEAK OUTPUT
Heat Coverage	- UP-TO 2,150 sq. ft. (up to 180m ²) COVERAGE
Heat Source	- Wood
Burn Time	- Up-To 10hr
Efficiency	- 67%
Emissions	- 1.98 g/h
Certification	- Certified for EPA 2020 New Source Performance Standards
Clearance	- Rear clearance 10" (254mm)
Warranty	- 10 Year Limited Warranty
Applications	- Households, Cottages, Cabins, Workshops, Garages

N65 Wood Stove


N65

Clearances to Combustible Material

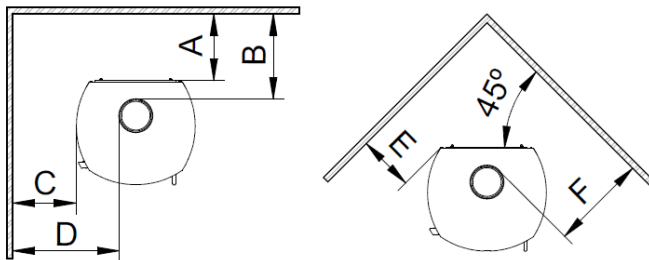

Minimum Clearance	Single Wall Connector	Double Wall Connector
A Back wall to stove rear	13" (330 mm)	10" (254 mm)
B Back Wall to connector pipe	16.5" (419 mm)	13" (330 mm)
C Side Wall to stove side	12" (305 mm)	12" (305 mm)
D Side Wall to connector pipe	20.5" (521 mm)	20" (508 mm)
E Corner wall to stove corner	10.5" (267 mm)	6" (153 mm)
F Corner wall to connector pipe	18.5 po (470 mm)	13.5 po (343 mm)

Back Wall Exit Configuration

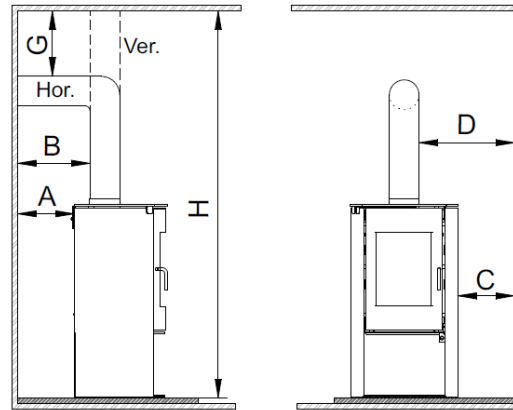

Minimum Clearance	Single Wall Connector	Double Wall Connector
A Back wall to stove rear	17 po (432 mm)	10 po (254 mm)
B Back Wall to connector pipe	20.5 po (521 mm)	13 po (330 mm)
C Side wall to stove side	12 po (305 mm)	12 po (305 mm)
D Side Wall to connector pipe	20.5 po (521 mm)	20 po (508 mm)
G Ceiling to horizontal connector pipe	18 po (457 mm)	16 po (407 mm)
H Ceiling to floor	82 po (2083 mm)	82 po (2083 mm)

Cat. No.	Colour	BTU's	Emissions	Dimensions (W x H x D)	Qty
N65	Black	68,500 (19.8kW)	1.98 g/h	22-3/4" x 40-7/8" x 19-1/4" 58.1cm x 103.7cm x 48.5cm	

Specifications may change without prior notice

Project:	Approval Information
Consultant Engineer:	
Distributor:	
Date:	
Contact at Dimplex:	
Comments:	



Approval Drawings

N65 Wood Stove